



Uniclass L532/32:P511	EPIC E411:X52/3
CI/SfB 43 Hi3	



THE SUSTAINABLE CHOICE





THE NATURAL CHOICE

Install a wooden floor and bring nature into your home. Like you, every tree is individual. It has been exposed to different seasons, climates and soils, all of which have an impact on the wood altering its hue and structure. The grain and colour variation on any single species of tree will be different, just like every human being is different.

Nature stores these differences as memories in the texture of the tree, memories which are revealed as the unique grains, knots, colours and shades which all contribute to the beauty and individuality of a real wooden floor. When you live with nature, you'll feel the difference. Wood is warm to the touch not cold like stone or plastic and will enhance any home, compliment any decor or style and combine classic looks, quality and durability.

Choose from a variety of flooring such as traditional oak or the more exotic boards such as maple, bamboo or

walnut, all harvested from sustainable woodlands. With an unparalleled range of colours and finishes, nothing compares to the luxurious ambiance and warmth of natural hardwood floors.

Solid wood flooring offers a cost effective solution which is also a sound long term investment that can increase the value of your home whilst enriching your living space with natural beauty and an inviting warm ambiance.

To find out how a natural wood floor could enhance your surroundings call us on **01666 504015**.

Light Oak	p11
Dark Oak	p16
Antique and Heritage Oak	p18
Walnut	p22
Topwood	p24
Bamboo	p26
Parquet	p28
Maple	p30



E303 Unfinished White Oak Floor with Natural Oil - see page 12.

When you live with nature, you'll feel the difference. Wood is warm to the touch and will enhance any home, compliment any decor or style and combine classic looks with quality and durability.

Why choose wood?

- 1** Wooden flooring adds a natural charm to any room in your home or environments such as clubs, pubs, shops, museums, offices and commercial premises. There are endless possibilities in choosing a design to complement your current decor.
- 2** Wooden flooring is more durable and lasts longer than ever before with the technology of modern protective finishes. Because of its longevity and durability solid and engineered hardwood flooring possibly provides the best value-for-money option compared to other types of flooring.
- 3** Wood is an insulator, helping to keep heat in when it is cold and the house cool when it is hot. Solid wood is also a fibrous material and it absorbs sound.
- 4** Hardwood flooring will add value to your home making it a good investment. Installation is quick and easy on any surface if you use professional fitters.
- 5** Regular sweeping or vacuuming and the occasional mop (with the recommended cleaner) is all it takes to maintain any wood floor and its lustre will remain because dirt and dust do not stick to hardwood surfaces. We also supply maintenance kits to keep your floor looking pristine.
- 6** Wood will absorb impact better than other floor types because it's a living, natural product, making it potentially safer for places with children and babies.
- 7** Hardwood flooring is clean and dust mites or any other allergic organisms do not live on such floors making it ideal for the modern environment where so much pollution surrounds us. Hardwood flooring is perfect to combat asthma and numerous other allergies.



**WOODEN FLOORS
ADD A NATURAL
CHARM TO ANY ROOM
ALLOWING ENDLESS
DESIGN POSSIBILITIES
AND UNIQUE FINISHES**

THE ARCHITECT'S & DESIGNER'S CHOICE

Please see NBS Plus for the full specification of all our products.

For reference we have a direct link on our home page to make them easier to specify.

In the highly demanding world of architecture and interior design, clients have high expectations and projects have short lead times. Achieving a high quality finish often depends on selecting the best materials. Our experience of working with architects and interior designers has given us a proven track record of delivering high profile projects on time and on budget.

Our wooden flooring is specifically designed for the UK market due to our specialist knowledge and experience of working with Architects and Interior Designers. A large number of our products have evolved from architect and designers specifications where we have been asked to manufacture a particular wooden floor to a very specific design.

If we do not have the wood floor you require in our range we can manufacture your specific needs providing you meet the minimum area requirement.

We enjoy and love what we do and this is shown in the quality of our work. As well as many domestic installations we have worked alongside some of the UK's most prestigious house builders and property developers. Having over 40 years combined experience in the construction and refurbishment industry, we are confident that we can accommodate any flooring restoration,

LATEST TRENDS

See our white oiled floors on pg 13 and bespoke parquet on pg 28 for the latest design trends.

repair or installation you require. With the skills, tools and transport to complete any given assignment we can offer both you and your clients the level of service and commitment you have come to expect.

We always insist on supplying samples and are happy to deliver large panels to site or to your office for larger projects. We have one of the most extensive range of products in the UK and with our square edge unfinished Oak Floors we can create the ultimate designer look.

It is easy to specify our flooring for any project, just select a product code from this brochure and visit our web site. Search using the product code which will then give you all the information you require, including all the accessories that match the floor and information regarding the essential maintenance care kits.

As our company has no middlemen and low overheads, we feel that our prices are the best in the market for the quality of wooden flooring available.

For additional help just call us on **01666 504015** or visit The Building Centre, Store Street, London to see our full range at our permanent display.



E802 Carbonised Oak Floor - see page 22 for details.




E308 Antique Natural Oak Floor - see page 21 for details.

CLIENTS INCLUDE

Wildwood Design who advise Crew Clothing and we were selected for their flagship store in Cardiff
Wetherspoon Inns
The White Hart Pub in Drury Lane, London
Holy Trinity Church Finchley Road, London
Major galleries and museums
Prominent night clubs
Architects and contractors
Hotels and other major retailers throughout the UK
Hilton at Terminal Five
Universities and colleges
Royal Albert Museum, Exeter
Visit www.thesolidwoodflooringcompany.com to see our full client list and latest projects.

Achieving a high quality finish often depends on selecting the best materials. Our experience of working with architects and interior designers has given us a proven track record of delivering top quality materials to high profile projects on time and on budget.

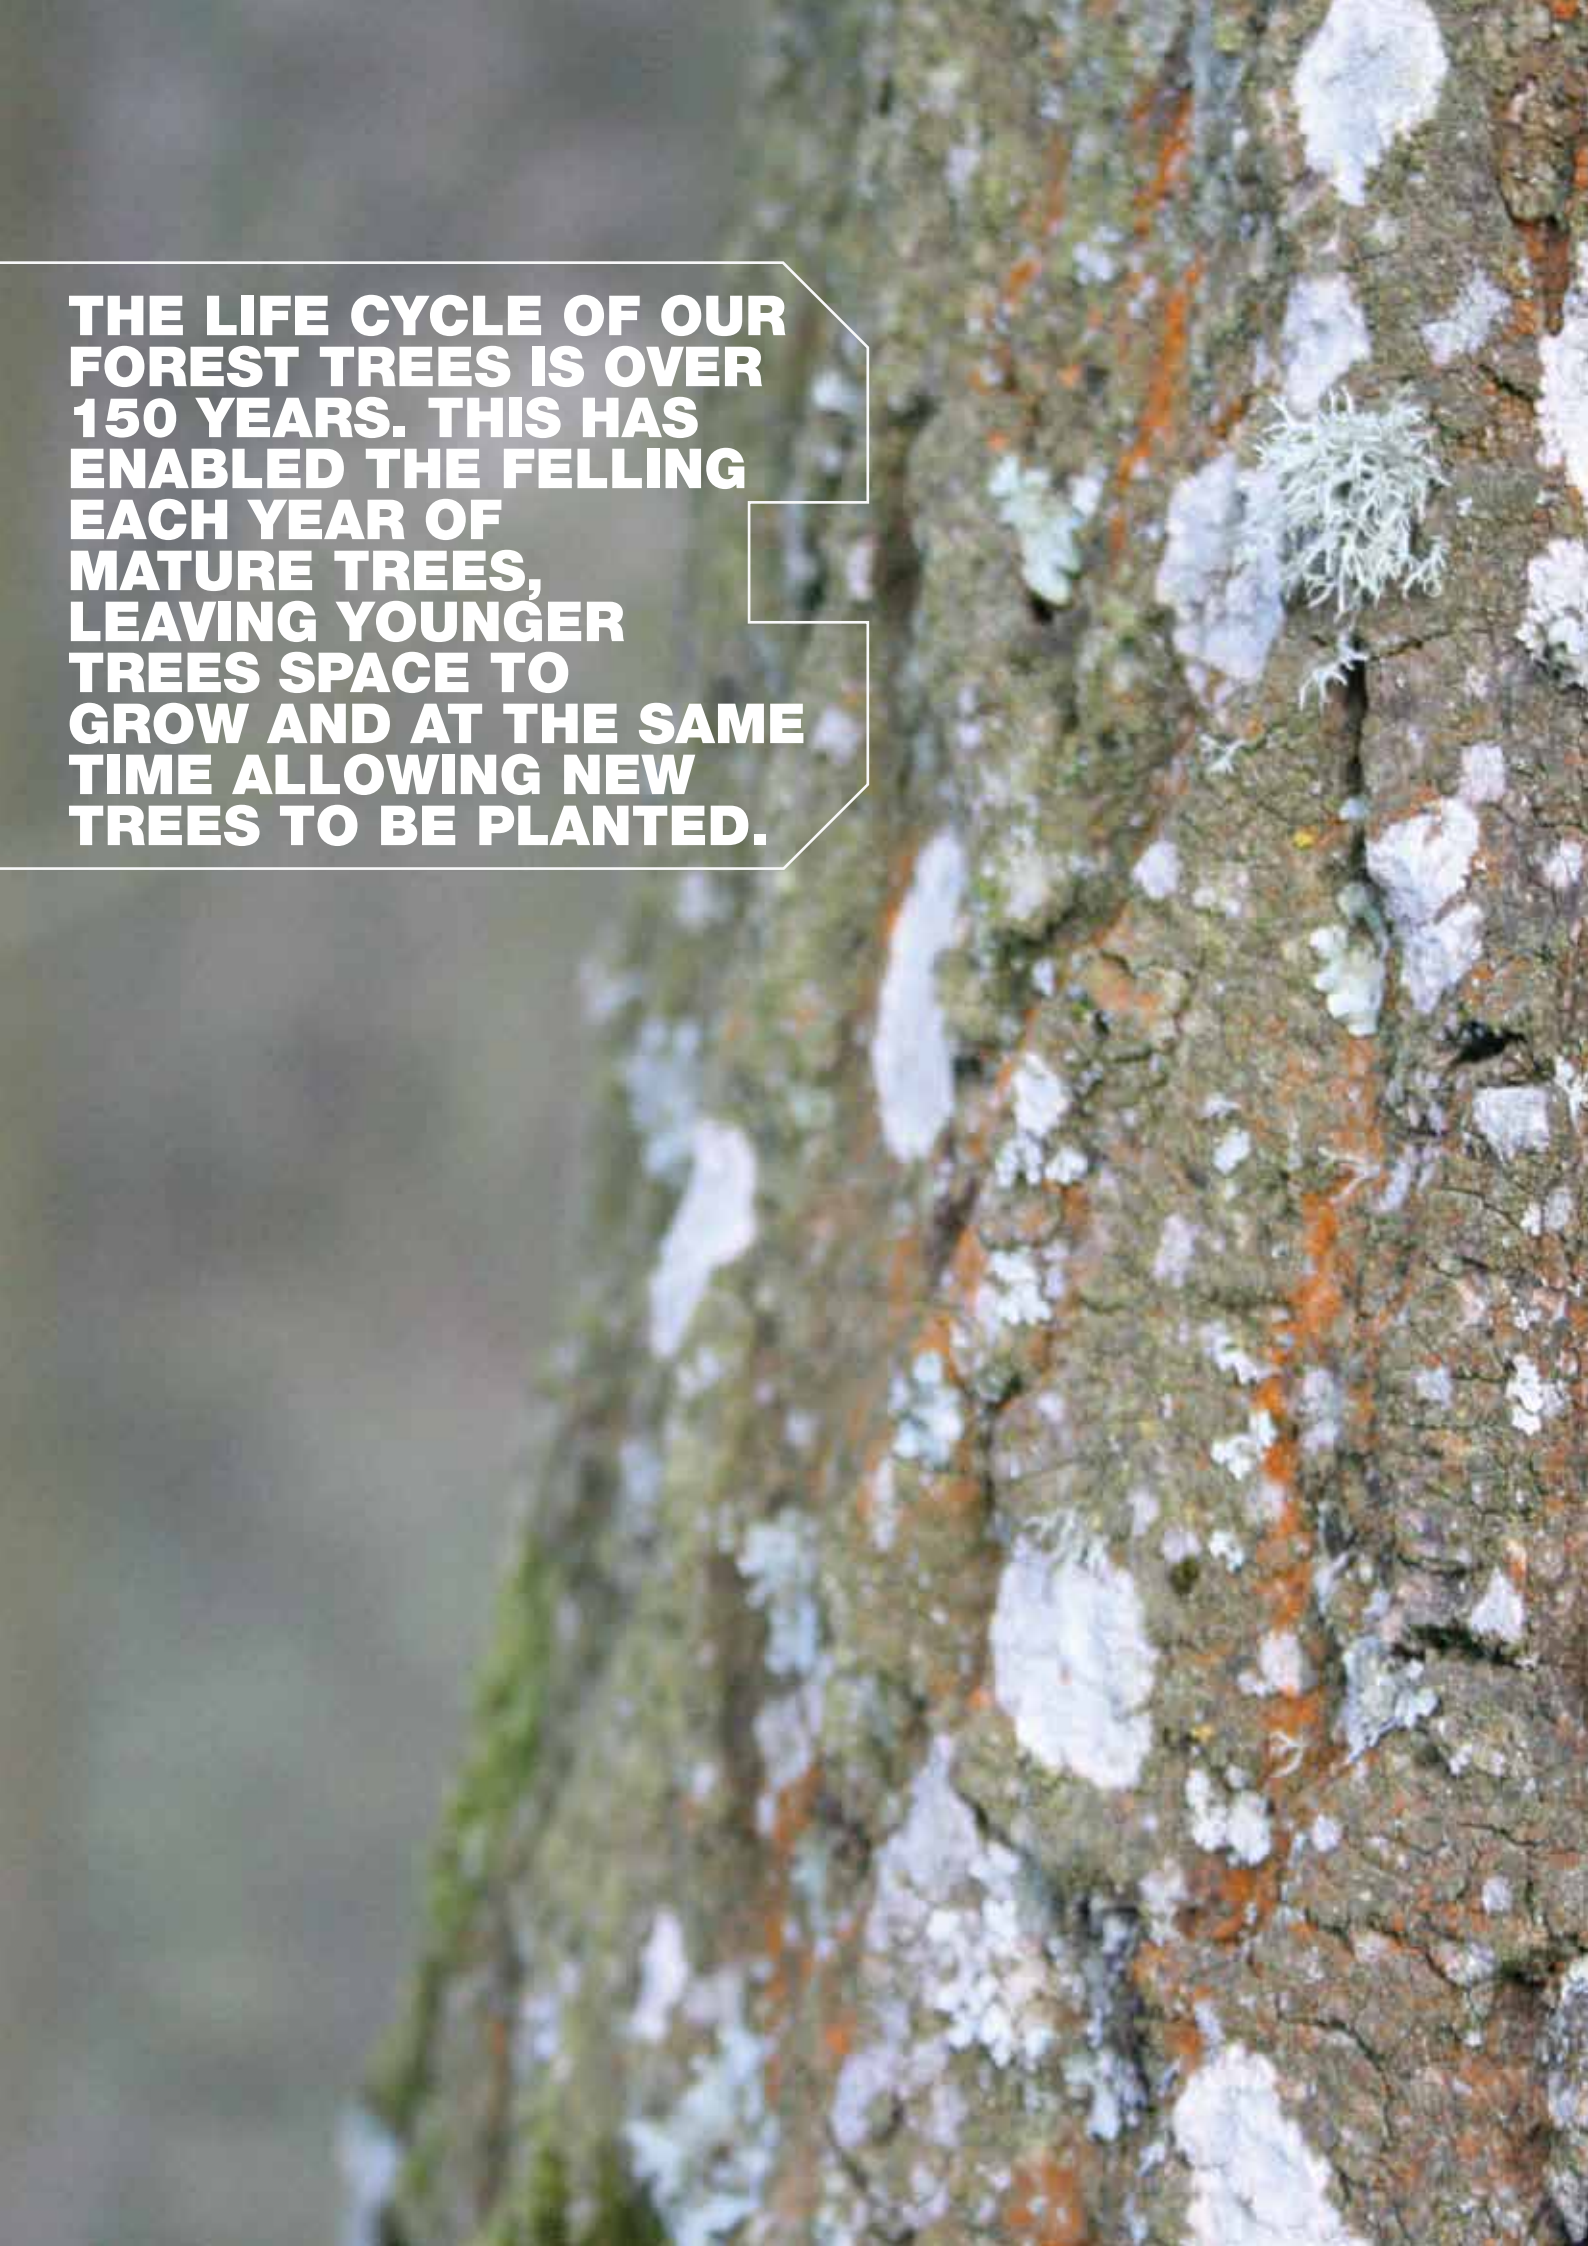A close-up photograph of a tree trunk showing rough, textured bark. The bark is covered with various types of lichen, including white, grey, and orange patches, and some green moss. The background is a blurred, greyish-green color.

THE LIFE CYCLE OF OUR FOREST TREES IS OVER 150 YEARS. THIS HAS ENABLED THE FELLING EACH YEAR OF MATURE TREES, LEAVING YOUNGER TREES SPACE TO GROW AND AT THE SAME TIME ALLOWING NEW TREES TO BE PLANTED.

THE SUSTAINABLE CHOICE

As a member of the Forest Stewardship Council (FSC) we source our wood from well managed forests, giving you the reassurance that you are not contributing to global deforestation.

The Solid Wood Flooring Company has made it a policy to only source from well managed, legal, sustainable forests and be responsible not only to the environment but also our clients, staff and contractors. Our manufacturing cycle begins with a sustainable managed forest. The life cycle of these forest trees is over 150 years enabling the felling of mature trees each year, leaving younger trees space to grow and allowing new trees to be planted. In fact more new trees are planted than there are harvested!

We are members of The Forest Stewardship Council (FSC) with a chain of custody certificate which means that all our FSC certified flooring can be traced back to the forest where it was harvested.

We are also committed members of the Timber Trade Federation (TTF) and implement their Environmental Code of Practice and responsible purchasing policy (RPP). The RPP is a key issue in the timber industry today as it will ensure that all forests will eventually become totally sustainable, and over time the rainforest will get replanted.

Following this policy ensures that for every tree harvested there will be more than one replanted. Never buy cheap wood flooring as it will invariably come from illegal logging operations where there is no management and locals cutting down trees and selling the raw material cheaply. Well managed forests select only the best timber.

For further information on sustainable forestry please visit www.ttf.co.uk or www.fsc.org

The USA has always had a Sustainable Forest Initiative due to its historic use of timber in house building and flooring. There is a regulatory framework enforcing good forestry practise throughout the US and Canada which is where our American White Oak, American Black Walnut and Canadian Maple are sourced.

We are also environmentally minded during our manufacturing process using off-cuts of Oak and Walnut to manufacture our Sandwich Engineered Oak and fine line flooring means less wastage from the timber harvested.

As members of the Timber Trade Federation we adhere to their Responsible Purchasing Policy and complete our due diligence audit each year on all of our products.



Wood flooring is our only renewable choice. Plastics come from fossil fuels whilst concrete and other forms of flooring can harm our environment with the energy required for their production.

Wood is a natural product that grows in abundance and is one of the few truly sustainable building materials we have. Properly managed, a forest can supply wood indefinitely whilst being part of a rich and varied ecosystem.





**SOLID OR ENGINEERED
FLOORING WILL ADD
VALUE TO YOUR
HOME MAKING THE
INSTALLATION A
GREAT INVESTMENT**

THE QUALITY CHOICE

Using modern protective finishes, wooden flooring is more durable and lasts longer than ever before. Compared to other types of flooring, hardwood flooring provides one of the best possible value-for-money options.

Our specialists select the finest trees and carefully inspect all timber before accepting the logs into the manufacturing cycle. In the manufacturing cycle, we maximize the log stability and strictly control the moisture level through our saw mill and kiln drying facility, all our floors are dried to less than 8% moisture content to increase the durability and dimensional stability of all our wooden floors.

Logs are precisely sawed to ensure simple and impeccable installation, maximize output and reduce cost. The planks are manufactured straight,

with a constant thickness and width, which saves time and reduces wastage.

All our flooring is hard wearing and can be used in the home and commercially in pubs, clubs, offices, retail outlets and hotels in fact anywhere where there is a floor! All our engineered boards are suitable for use with underfloor heating (UFH) systems subject to using the correct procedure and products.

Wood flooring is a big investment so always look for something that will last you a lifetime. We place the most emphasis on quality and functionality and

with no middlemen so you receive a top quality product at a reasonable price.

These competitive prices along with using our recommended experienced teams of wooden flooring fitters can save you hundreds or even thousands of pounds depending on the size of your project.

We are here to help and offer free friendly advice on all aspects of wooden flooring. We offer a survey service and help to enable you to choose the appropriate flooring for your environment. For additional help just call us on **01666 504015** or visit **www.thesolidwoodflooringcompany.com**

Why use the Solid Wood Flooring Company?

- Wooden flooring manufactured to British Standards
- Flooring made specifically for the UK market
- Extensive wood flooring information and specification
- One of the largest ranges of wooden flooring products on the market
- All our timber comes from sustainable sources
- Environmentally aware and environmentally friendly products and finishes
- Large stocks for immediate delivery
- Extensive unbiased advice and experience with large and small specialist projects
- Finishing on site with WOCA or Blanchon Oils
- The ability to manufacture to the client's exact specification if we do not currently stock the product subject to minimum volume requirements
- Product and installation guarantees if you use our fitters
- On site visits for consultation and helping to define the specification
- Knowledge and experience of under floor heating systems and wooden flooring installations
- Easy Specification of our products
- Our fitters are able to make matching staircases and panel walls if required. With more than 25 years experience installing wooden floors including Engineered and solid wood so you can have a lifetime of trouble free wooden flooring



E308LN Engineered Antique Natural Oak Floor. See page 19 for details.



E110UF Unfinished Sandwich Oak Floor finished with Natural Master Oil. See page 11 for details.

THE PROFESSIONAL CHOICE



The Solid Wood Flooring Company can help you to create your perfect wooden floor from a blank canvas. Choose from one of the largest ranges of wooden flooring in the UK, specify the size, finish and colour you require then simply let our experienced team of fitters do the rest.

How to use this brochure

1. Code and finish

We have three main ranges of flooring which differentiates the finishes and production line. All the finishes are applied under strict factory and quality control procedure to ensure the hardest wearing surfaces available. If there is no specified finish then it will be supplied unfinished to 120 grit. **See page 30 for details.**

2. Product swatch

The swatches in this brochure are representative of the final colour and texture of the board but, due to natural variability of the wood, they are not an exact representation. To see the true colour and texture of your floor please order a free sample by calling **01666 504015** or visiting **www.thesolidwoodflooringcompany.com**.

3. Board grading

The grading gives an idea of the colour variation, number and size of knots and the appearance of your floor. Visit **www.thesolidwoodflooringcompany.com** for full details.

4. Length

Our boards come in fixed lengths. Some packs will contain one split length board to assist fitting. Visit **www.thesolidwoodflooringcompany.com** for full details.

5. Finish

We have four types of prefinished boards and details of these can be seen on page 30. For individuality you can use our range of oils and hard waxes on our unfinished flooring to create a unique look. **See pages 28-29 for details.**

6. Fitting options

N Suitable for secret nailing or secret screws.

G Suitable to glue directly to screed or floors using Bona R850 adhesive.

F Suitable for floating on underlay where the tongue and grooves are glued together.

UFH Suitable for underfloor heating but always glue to the screed if possible.

1 DIAMOND-E110



2

Unfinished Engineered American White Oak Floor Floor

Select board with few knots.

3 Grade ABC.

Width	189mm with a square edge
Thickness	20mm tongue and groove 4 sides
Structure	Top 5mm solid oak
Base	15mm crossply hardwood

4 Length

Random lengths or long

5 Coverage per Carton

2.08m² in 5 pieces

6 Finish

Unfinished

6 Floor Fitting Options

N **G** **F** **UFH**

FREE SAMPLE SERVICE



CALL FOR DETAILS ON
01666 504015

LIGHT NATURAL OAK

Our extensive range of solid oak and engineered white oak flooring includes lacquered, oiled, and unfinished oak floors from 150mm wide to 340mm wide. These high quality oak floors make any room unique and will add value to your home.



Starting with the blank canvas of our unfinished boards, you can select from an almost limitless range of colours, sheens and finishes to create the perfect ambience for your room.

SEE PAGES 28-29 FOR DETAILS



AMETHYST-E104



Rustic Engineered Oak Floor

Rustic board with character and knots. Grade CD.

Width	150mm with a micro bevel
Thickness	15mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 11mm crossply hardwood
Length	1830mm some cartons with split board
Coverage per Carton	1.65 m ² in 6 pieces
Finish	Lacquered
Floor Fitting Options	N G F UFH

AMETHYST-E108



Engineered Antique Unfinished Oak Floor

Antique Rustic board, with open knots and character. Grade CDE.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak Base 14mm crossply hardwood
Length	2200mm with one board in each carton split
Coverage per Carton	1.94m ² in 4 pieces
Finish	Unfinished
Floor Fitting Options	N G F UFH

AMETHYST-E109UF



Engineered Antique Unfinished Oak Floor

Antique Rustic board, with open knots and character. Grade CDE.

Width	260mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak Base 14mm crossply hardwood
Length	2200mm with one board in each carton split
Coverage per Carton	2.28m ² in 4 pieces
Finish	Unfinished
Floor Fitting Options	N G F UFH

AMETHYST-E110




Unfinished Sandwich Oak Floor

Select clean oak floor with hardly any knots. Grade ABC.

Width	340mm with a square edge
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak Base 9mm oak middle layer, 5mm oak bottom layer
Length	2200mm some cartons with a split board
Coverage per Carton	2.99m ² in 4 pieces
Finish	Unfinished with knots not filled
Floor Fitting Options	N G F UFH

AMETHYST-E120

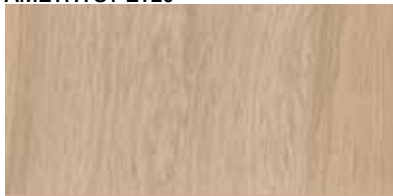

Unfinished Engineered Oak Floor

Select oak floor with few knots. Grade ABC.

Width	189mm with a square edge
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak Base 14mm crossply hardwood
Length	2200mm some cartons with a split board
Coverage per Carton	2.08m ² in 5 pieces
Finish	Unfinished with knots not filled
Floor Fitting Options	N G F UFH

AMETHYST-E121



Engineered Brushed Rustic Oak floor

Rustic Grade board with knots and character. Grade CD.

Width	189mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak Base 14mm crossply hardwood
Length	2200mm with one board in each carton split
Coverage per Carton	2.08m ² in 4 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH

N Suitable for **secret nailing** or **secret screws**.

G Suitable to **glue** directly to screed or floors using Bona R850 adhesive.

F Suitable for **floating** on underlay where the tongue and grooves are glued together.

UFH Suitable for **underfloor heating** but always glue to the screed if possible.

FREE SAMPLE SERVICE



CALL FOR DETAILS ON
01666 504015

AMETHYST-E125



Engineered Bushed Rustic
Oak Floor

Rustic Grade board with knots and character.
Grade CD.

Width	189mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 16mm crossply hardwood
Length	2200mm with one board in each carton split
Coverage per Carton	2.08m ² in 5 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH

AMETHYST-E126



Engineered Brushed Select
Oak Floor

Select Grade board with few knots.
Grade ABC.

Width	189mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak Base 14mm crossply hardwood
Length	2200mm with one board in each carton split
Coverage per Carton	2.08m ² in 5 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH



**EXTENSIVE STOCKS FOR
IMMEDIATE DELIVERY
NATIONWIDE AND EUROPE**

AMETHYST-E127



Engineered Rustic
Oak Floor

Rustic Grade board with knots and character.
Grade CD.

Width	189mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak Base 14mm crossply hardwood
Length	2200mm some cartons with a split board
Coverage per Carton	2.08m ² in 5 pieces
Finish	Lacquered
Floor Fitting Options	N G F UFH

AMETHYST-E150



Unfinished Engineered
Oak Floor

Select clean oak floor with few knots.
Grade ABC.

Width	220mm with a square edge
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 16mm crossply hardwood
Length	2200mm some cartons with a split board
Coverage per Carton	1.94m ² in 4 pieces
Finish	Unfinished with knots not filled
Floor Fitting Options	N G F UFH

AMETHYST-E154



Engineered Rustic
Oak Floor

Rustic grade board with knots and character.
Grade CD.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 16mm crossply hardwood
Length	2200mm with one board in each carton split
Coverage per Carton	1.94m ² in 4 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	N G F UFH

AMETHYST-E155



Engineered White Lacquered
Oak Floor

Select grade board with few knots.
Grade ABC.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 16mm crossply hardwood
Length	2200mm with one board in each carton split
Coverage per Carton	1.94m ² in 4 pieces
Finish	White Lacquer
Floor Fitting Options	N G F UFH

AMETHYST-E157



Unfinished Engineered
Oak Floor


Select board with few knots.
Grade ABC.

Width	260mm with a square edge
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak Base 14mm crossply hardwood
Length	2200mm some cartons with a split board
Coverage per Carton	2.29m ² in 4 pieces
Finish	Unfinished
Floor Fitting Options	N G F UFH



E110 340mm Wide Unfinished Sandwich Oak Floor. See page 11.

AMETHYST-E158

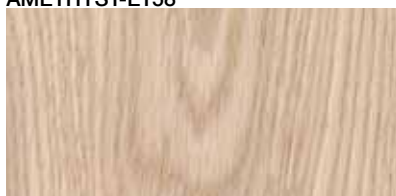

Engineered Brushed White Oiled Oak Floor

Select grade board with few knots.
Grade ABC.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure Top	4mm solid oak
Base	16mm crossply hardwood
Length	2200mm with one board in each carton split
Coverage per Carton	1.94m ² in 4 pieces
Finish	WOCA WHITE UV Oil
Floor Fitting Options	N G F UFH

AMETHYST-E172



Engineered Brushed Click Lock Natural Oak Floor

Select grade board with few knots.
Grade ABC.

Width	189mm with a micro bevel
Thickness	15mm click system 4 sides
Structure Top	4mm solid oak
Base	11mm thick with poplar middle
Length	1830mm with one board in each carton split
Coverage per Carton	2.08m ² in 6 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH

AMETHYST-E173




Prime Unfinished Engineered Oak Floor

Prime oak floor with no knots.
Grade AB.

Width	189mm with a square edge
Thickness	15mm tongue and groove 4 sides
Structure Top	6mm solid oak
Base	11mm with poplar middle
Length	1860mm some cartons with a split board
Coverage per Carton	2.1m ² in 6 pieces
Finish	Unfinished
Floor Fitting Options	N G F UFH

DIAMOND-E176

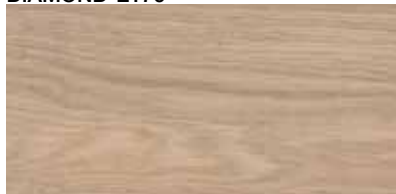

Engineered Brushed Click Lock White Oiled Oak Floor

Select Grade board with few knots.
Grade ABC.

Width	189mm with a micro bevel
Thickness	15mm click system 4 sides
Structure Top	4mm solid oak
Base	11mm thick with poplar middle
Length	1830mm with one board in each carton split
Coverage per Carton	2.08m ² in 6 pieces
Finish	WOCA White Oil
Floor Fitting Options	N G F UFH

DIAMOND-E302N



Engineered Natural White Oak Floor

Prime grade board with no knots.
Grade AB.

Width	150mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure Top	4mm solid oak
Base	16mm thick 9 layers of crossply hardwood
Length	Fixed length 1860mm
Coverage per Carton	1.67m ² in 6 pieces
Finish	Bona Industrial matt lacquer 9 coats
Floor Fitting Options	N G F UFH

DIAMOND-E303LN



Unfinished Engineered Oak Floor

Rustic board with character.
Grade ABC.

Width	150mm with a square edge
Thickness	20mm tongue and groove 4 sides
Structure Top	4mm solid oak
Base	16mm crossply hardwood
Length	1830mm some cartons with split board
Coverage per Carton	1.65m ² in 5 pieces
Finish	Unfinished with knots not filled
Floor Fitting Options	N G F UFH

N Suitable for **secret nailing** or **secret screws**.

G Suitable to **glue** directly to screed or floors using Bona R850 adhesive.

F Suitable for **floating** on underlay where the tongue and grooves are glued together.

UFH Suitable for **underfloor heating** but always glue to the screed if possible.

LIGHT NATURAL OAK

DIAMOND-E304N



Engineered Rustic
Oak Floor

Rustic Grade board with knots and character.
Grade CD.

Width	150mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 16mm crossply hardwood
Length	1830mm some cartons with a split board
Coverage per Carton	1.65m ² in 6 pieces
Finish	Lacquered
Floor Fitting Options	N G F UFH

DIAMOND-E306LN



Engineered Natural White
Oak Floor

Select grade board with few knots.
Grade ABC.

Width	189mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak Base 14mm crossply hardwood
Length	Fixed length 2200mm
Coverage per Carton	2.08m ² in 5 pieces
Finish	Bona Industrial matt lacquer 9 coats
Floor Fitting Options	N G F UFH

DIAMOND-E311LN



Engineered Brushed Oiled
White Oak Floor

Rustic grade board with knots and character.
Grade CD.

Width	150mm with a square edge
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 16mm crossply hardwood
Length	Fixed length 1860mm
Coverage per Carton	1.65m ² in 6 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH

DIAMOND-E317LN



Engineered Oiled White
Oak Floor

Rustic grade board with knots and character.
Grade CD.

Width	150mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 16mm crossply hardwood
Length	Fixed length 1860mm
Coverage per Carton	1.65m ² in 6 pieces
Finish	Natural WOCA Oil
Floor Fitting Options	N G F UFH

DIAMOND-E340N



Engineered Oiled White
Oak Floor

Mixed Grade board, will contain knots.
Grade ABCD.

Width	189mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak Base 14mm crossply hardwood
Length	Fixed length 1860mm
Coverage per Carton	1.76m ² in 5 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	N G F UFH

DIAMOND E351LN



Engineered White
Oak Floor

Select grade board with few knots.
Grade ABC.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 16mm crossply hardwood
Length	2200mm some cartons with a split board
Coverage per Carton	1.94m ² in 4 pieces
Finish	Lacquered
Floor Fitting Options	N G F UFH

FREE SAMPLE SERVICE



CALL FOR DETAILS ON
01666 504015

DIAMOND-E352L



Engineered Brushed White
Oak Floor

Select grade board with few knots.
Grade ABC.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 16mm crossply hardwood
Length	2200mm with one board in each carton split
Coverage per Carton	1.94m ² in 4 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH

DIAMOND-E360LN



Engineered Brushed Limed
White Oak Floor

Select Grade board with few knots.
Grade ABC.

Width	189mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 14mm crossply hardwood
Length	Fixed length 2200mm
Coverage per Carton	2.08m ² in 5 pieces
Finish	Lacquered
Floor Fitting Options	N G F UFH

DIAMOND-E701



Engineered Fineline Natural Oak Floor

Prime Grade Fineline. Grade AB.

Width	190mm with a micro bevel
Thickness	21mm tongue and groove 4 sides
Structure	Top 4mm solid oak
	Base 14mm solid oak centre, 3mm bottom layer.
Length	Fixed Length 1860mm
Coverage per Carton	1.77m ² in 5 pieces
Finish	Natural WOCA Oil
Floor Fitting Options	N G F UFH

DIAMOND-S204



Brushed Solid Natural Oak Floor

Rustic grade board with knots and character. Grade CD.

Width	150mm with a micro bevel
Thickness	18mm tongue and groove 4 sides
Length	Random lengths or long
Coverage per Carton	1.65m ² in 5 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G

AMETHYST-S750



Brushed Engineered WHITE UV Oiled Oak Floor

Lovely clean board. Grade ABC.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak
	Base 16mm thick 9 layers of crossply hardwood
Length	2200mm with one board in each carton split
Coverage per Carton	1.94m ² in 4 pieces
Finish	WOCA WHITE UV Oil
Floor Fitting Options	N G F UFH



E158 Brushed Engineered White UV Oiled Oak Floor. See page 13 for details.



N Suitable for **secret nailing** or **secret screws**.

G Suitable to **glue** directly to screed or floors using Bona R850 adhesive.



F Suitable for **floating** on underlay where the tongue and grooves are glued together.

UFH Suitable for **underfloor heating** but always glue to the screed if possible.

DARK NATURAL OAK



Natural oils and coloured oils can be very effective and hard wearing when finishing an oak floor. Hardwood floors are more stable when made as engineered flooring. If you use solid oak then beware of the dangers of movement.

Complete your floor installation perfectly. We have a range of accessories to match all our Antique Oak, Oak and Walnut Flooring.

SEE PAGES 28-29 FOR DETAILS



AMETHYST-E124



Engineered Brushed Fumed Oak Floor

Select grade board with few knots.
Grade ABC.

Width	189mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak Base 14mm crossply hardwood
Length	2200mm with one board in each carton split
Coverage per Carton	2.08m ² in 5 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH

AMETHYST-E128



Engineered Brushed Smoke Oak Floor

Select grade board with few knots.
Grade ABC.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 16mm crossply hardwood
Length	2200mm
Coverage per Carton	1.94m ² in 4 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH

AMETHYST-E144



Engineered Brushed Smoke Oak Floor

Select grade board with few knots.
Grade ABC.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 16mm crossply hardwood
Length	2200mm
Coverage per Carton	1.94m ² in 4 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	N G F UFH



EXTENSIVE STOCKS FOR IMMEDIATE DELIVERY NATIONWIDE AND EUROPE

DIAMOND-E151



Engineered Brushed Fumed Unfinished Oak Floor

Mixed Grade board, some boards will have knots. Grade ABCD.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 14mm crossply hardwood
Length	2200mm
Coverage per Carton	1.94m ² in 4 pieces
Finish	Unfinished
Floor Fitting Options	N G F UFH

DIAMOND-E152



Engineered Fumed Unfinished Oak Floor

Mixed grade board, some boards will have knots. Grade ABCD.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak Base 14mm crossply hardwood
Length	2200mm
Coverage per Carton	1.94m ² in 4 pieces
Finish	Unfinished
Floor Fitting Options	N G F UFH

DIAMOND-E153



Engineered Fumed Satin Oiled Oak Floor

Mixed grade, will contain knots and variation. Grade ABCD.

Width	220mm with a micro bevel		
Thickness	20mm tongue and groove 4 sides		
Structure	Top	4mm solid oak	
	Base	14mm crossply hardwood	
Length	2200mm		
Coverage per Carton	2.2m ² in 5 pieces		
Finish	Satin Oil		
Floor Fitting Options	N	G	F UFH

DIAMOND-E312




Engineered Smoke Oak Floor

Mixed grade board, some boards will have knots. Grade ABCD.

Width	189mm with a micro bevel		
Thickness	20mm tongue and groove 4 sides		
Structure	Top	4mm solid oak	
	Base	16mm crossply hardwood	
Length	2200mm		
Coverage per Carton	2.08m ² in 5 pieces		
Finish	Bona industrial matt lacquer		
Floor Fitting Options	N	G	F UFH

DIAMOND-E313

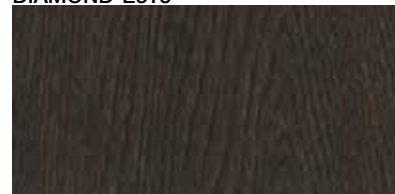


Engineered Burnt Oak Floor

Mixed Grade board, some boards will have knots. Grade ABCD.

Width	189mm with a micro bevel		
Thickness	20mm tongue and groove 4 sides		
Structure	Top	4mm solid oak	
	Base	16mm crossply hardwood	
Length	2220mm		
Coverage per Carton	2.08m ² in 5 pieces		
Finish	Bona industrial matt lacquer		
Floor Fitting Options	N	G	F UFH

DIAMOND-E315

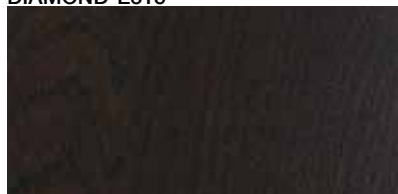


Engineered Burnt Oak Floor

Mixed grade board, some boards will have knots. Grade ABCD.

Width	150mm with a micro bevel		
Thickness	20mm tongue and groove 4 sides		
Structure	Top	4mm solid oak	
	Base	16mm crossply hardwood	
Length	1860mm		
Coverage per Carton	1.65m ² in 6 pieces		
Finish	Bona industrial matt lacquer		
Floor Fitting Options	N	G	F UFH

DIAMOND-E321

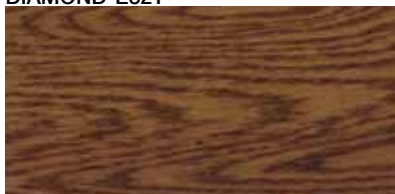

Engineered Smoke Oak Floor

Select grade board with few knots. Grade ABC.

Width	150mm with a micro bevel		
Thickness	20mm tongue and groove 4 sides		
Structure	Top	4mm solid oak	
	Base	16mm crossply hardwood	
Length	1860mm		
Coverage per Carton	1.65m ² in 6 pieces		
Finish	Bona industrial matt lacquer 9 coats		
Floor Fitting Options	N	G	F UFH

DIAMOND-E341



Engineered Brushed Brown Oak Floor

Select grade board with few knots. Grade ABC.

Width	150mm with a micro bevel		
Thickness	20mm tongue and groove 4 sides		
Structure	Top	4mm solid oak	
	Base	16mm crossply hardwood	
Length	1860mm		
Coverage per Carton	1.65m ² in 6 pieces		
Finish	WOCA UV Oil		
Floor Fitting Options	N	G	F UFH

DIAMOND-E342



Engineered Brushed Black Oak Floor

Select grade board with few knots. Grade ABC.

Width	150mm with a micro bevel		
Thickness	20mm tongue and groove 4 sides		
Structure	Top	4mm solid oak	
	Base	16mm crossply hardwood	
Length	1860mm		
Coverage per Carton	1.65m ² in 6 pieces		
Finish	Bona industrial matt lacquer 9 coats		
Floor Fitting Options	N	G	F UFH

DIAMOND-E354



Engineered Natural Oil Smoke Oak Floor

Lovely clean board. Grade ABCD.

Width	220mm with a micro bevel		
Thickness	19mm tongue and groove 4 sides		
Structure	Top	4mm solid oak	
	Base	15mm thick 9 layers of crossply hardwood	
Length	1860mm with one board in each carton split		
Coverage per Carton	2.05m ² in 5 pieces		
Finish	Natural WOCA Oil		
Floor Fitting Options	N	G	F UFH



E321 Engineered smoke oak floor. See above for details.

N Suitable for **secret nailing** or **secret screws**.

G Suitable to **glue** directly to screed or floors using Bona R850 adhesive.

F Suitable for **floating** on underlay where the tongue and grooves are glued together.

UFH Suitable for **underfloor heating** but always glue to the screed if possible.

ANTIQUÉ AND HERITAGE OAK



This wooden flooring has been hand distressed or brushed to create a floor that looks like antique reclaimed oak. This is real wood flooring at its best as our craftsmen and machinists are the best in the flooring industry, get your free sample to see for yourself.

Like elegantly aged antiques, they create luxurious old world character giving the appearance of an aged floor that has been walked on for a hundred years.

Our Antique hand scraped oak boards are like old world classic floors and are the result of man working with the best of nature to create a unique wooden floor. Like elegantly aged antiques, they create luxurious old world character giving the appearance of an aged floor that has been walked on for a hundred years.

We are proud of the craftsmanship and quality that goes into our antique oak floors which can adapt to a wide range of applications and lifestyles. Distinctive designs offer unlimited possibilities to help you create your dream room, with unique and beautifully crafted custom wood floors.

Unlike most of our competitors, our unique distressing technique is manual, we do not use machines. The problem with machine distressing is, as you look across the floor, you see the same

pattern repeating which lacks a natural feel. Some manufacturers are just denting, scooping, or roughing the floor. Others are sanding the floor unevenly to create a worn look. We make our antique oak floors by scraping the entire surface of the flooring creating unique handmade boards.

Throughout the scraping process, our skilled craftsmen sculpt along the natural flow of the wood grain and character mark to accent the true grace of nature's beauty. True craftsmen can create a reclaimed look complete with wormholes, splits and other naturally occurring character markings.

We can offer our antique boards in solid or engineered oak available in shades of natural, smoke or burnt and widths of 150mm or 189mm. They are finished with a matt, hard wearing lacquer or oil finish which is easy to clean and maintain.



DIAMOND-E300LN




Engineered Antique Natural Oak Floor

Rustic grade, hand-distressed flooring with knots and character. Grade CD.

Width	150mm with a micro bevel	
Thickness	20mm tongue and groove 4 sides	
Structure	Top	4mm solid oak
	Base	16mm crossply hardwood
Length	1860mm	
Coverage per Carton	1.65m ² in 6 pieces	
Finish	Bona Industrial matt lacquer 9 coats	
Floor Fitting Options	N G F UFH	

DIAMOND-E301LN

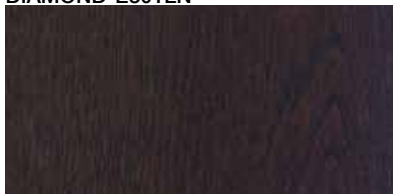

Engineered Antique Burnt Oak Floor

Rustic grade, hand-distressed flooring with knots and character. Grade CD.

Width	150mm with a micro bevel	
Thickness	20mm tongue and groove 4 sides	
Structure	Top	4mm solid oak
	Base	16mm crossply hardwood
Length	1860mm	
Coverage per Carton	1.65m ² in 6 pieces	
Finish	Bona Industrial matt lacquer 9 coats	
Floor Fitting Options	N G F UFH	

DIAMOND-E305LN



Engineered Antique Smoke Oak Floor

Rustic grade, hand-distressed flooring with knots and character. Grade CD.

Width	150mm with a micro bevel	
Thickness	20mm tongue and groove 4 sides	
Structure	Top	4mm solid oak
	Base	16mm crossply hardwood
Length	1860mm	
Coverage per Carton	1.65m ² in 6 pieces	
Finish	Bona Industrial matt lacquer 9 coats	
Floor Fitting Options	N G F UFH	

DIAMOND-E307LN



Engineered Antique Burnt Oak Floor

Rustic grade, hand-distressed flooring with knots and character. Grade CD.

Width	189mm with a micro bevel	
Thickness	20mm tongue and groove 4 sides	
Structure	Top	6mm solid oak
	Base	14mm crossply hardwood
Length	2200mm	
Coverage per Carton	2.08m ² in 5 pieces	
Finish	Bona Industrial matt lacquer 9 coats	
Floor Fitting Options	N G F UFH	

DIAMOND-E308LN



Engineered Antique Natural Oak Floor

Rustic grade, hand-distressed flooring with knots and character. Grade CD.

Width	189mm with a micro bevel	
Thickness	20mm tongue and groove 4 sides	
Structure	Top	6mm solid oak
	Base	14mm crossply hardwood
Length	2200mm	
Coverage per Carton	2.08m ² in 5 pieces	
Finish	Bona Industrial matt lacquer 9 coats	
Floor Fitting Options	N G F UFH	



EXTENSIVE STOCKS FOR IMMEDIATE DELIVERY NATIONWIDE AND EUROPE

DIAMOND-E309LN



Engineered Antique Smoke Oak Floor

Rustic grade, hand-distressed flooring with knots and character. Grade CD.

Width	189mm with a micro bevel	
Thickness	20mm tongue and groove 4 sides	
Structure	Top	6mm solid oak
	Base	14mm crossply hardwood
Length	2200mm	
Coverage per Carton	2.08m ² in 5 pieces	
Finish	Bona Industrial matt lacquer 9 coats	
Floor Fitting Options	N G F UFH	

DIAMOND-E310LN



Engineered Dark Brown Heritage Oak Floor

Mixed Grade board, some boards will have knots. Grade ABCD.

Width	150mm with chipped edges	
Thickness	20mm tongue and groove 4 sides	
Structure	Top	4mm solid oak
	Base	16mm crossply hardwood
Length	1860mm	
Coverage per Carton	2.08m ² in 5 pieces	
Finish	WOCA UV Oil	
Floor Fitting Options	N G F UFH	

FREE SAMPLE SERVICE



CALL FOR DETAILS ON 01666 504015

ANTIQUÉ AND HERITAGE OAK

DIAMOND-E343



Heritage Brushed Oiled Chipped Edge Engineered Oak Floor

Characterful board with chipped edges. Grade ABCD.

Width	190mm with chipped edges
Thickness	19mm tongue and groove 4 sides
Structure	Top 4mm solid oak
	Base 15mm thick 9 layers of crossply hardwood
Length	1860mm one board in each carton split
Coverage per Carton	1.78m ² in 5 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	N G F UFH

DIAMOND-E344LN



Engineered Dark Brown Heritage Oak Floor

Mixed Grade board, some boards will have knots. Grade ABCD.

Width	189mm with chipped edges
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak
	Base 16mm crossply hardwood
Length	2200mm
Coverage per Carton	2.08m ² in 5 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH

DIAMOND-E803



Engineered Antique Heritage Carbonized Oak Floor

Rustic Grade, Hand distressed flooring with knots and character. Grade CD.

Width	170mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak
	Base 16mm crossply hardwood
Length	1860mm
Coverage per Carton	1.90m ² in 6 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH

DIAMOND-E808



Engineered Heritage Carbonized Oak Floor

Select grade board with few knots. Grade ABC.

Width	170mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak
	Base 16mm crossply hardwood
Length	1860mm
Coverage per Carton	1.90m ² in 6 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH

AMETHYST-E107



Engineered Antique Smoke Oak Floor

Rustic grade, hand-distressed flooring with knots and character. Grade CD.

Width	220mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 6mm solid oak
	Base 14mm crossply hardwood
Length	2200mm
Coverage per Carton	1.94m ² in 4 pieces
Finish	Bona Industrial matt lacquer 9 coats
Floor Fitting Options	N G F UFH

DIAMOND-E804



Heritage Brushed UV Oiled Engineered Smoke Oak Floor

Rustic grade board with knots and character. Grade CD.

Width	170mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid oak
	Base 16mm crossply hardwood
Length	1860mm
Coverage per Carton	1.90m ² in 6 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G F UFH

FITTING WOOD FLOORING

Fitting wooden floors is a specialist job and should not be left to builders or others who do not know all the potential pitfalls associated with a natural floor. We can supply and fit or supply only, the choice is yours. We use only the most experienced floor installers who do this work every day and will be able make staircases, mat wells etc to match the floor you have chosen. With our fitters they can even cut a slice off the bottom of your skirting

boards so that they do not have to be removed and you are left with a "horrible" piece of beading around the edge. Please call to discuss your personal requirements and free advice.

These photos show what can happen if you employ a fitter who does not understand wooden flooring. These boards broke the marble fireplace and 'cupped', pushing out the wall!



CALL 01666 504015 TO SPEAK TO ONE OF OUR EXPERTS

DIAMOND-S751



Brushed Heritage Dark Brown
UV Oiled Solid Oak Floor

Select grade board with few knots.
Grade ABC.

Width	150mm with a micro bevel
Thickness	18mm tongue and groove 4 sides
Length	Random lengths or long
Coverage per Carton	1.65m ² in 5 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G

DIAMOND-S752



Brushed Heritage Smoke UV
Oiled Solid Oak Floor

Select grade board with few knots.
Grade ABC

Width	150mm with a micro bevel
Thickness	18mm tongue and groove 4 sides
Length	Random lengths or long
Coverage per Carton	1.65m ² in 5 pieces
Finish	WOCA UV Oil
Floor Fitting Options	N G

FREE SAMPLE SERVICE



**CALL FOR DETAILS ON
01666 504015**



E308LN – Antique Engineered Natural Oak Floor. See Page 19 for details.



N Suitable for **secret nailing** or **secret screws**.

G Suitable to **glue** directly to screed or floors using Bona R850 adhesive.

F Suitable for **floating** on underlay where the tongue and grooves are glued together.

UFH Suitable for **underfloor heating** but always glue to the screed if possible.

WALNUT FLOORING



Black American Walnut is a floor that is full of character and creates a statement in your home that exudes quality. We manufacture Engineered Walnut Boards to conserve our raw material. Walnut can also be used to make beautiful bespoke parquet panels.

The products shown here are our Standard American Black Walnut wood floors, which we have found to be most popular over the years.

If you want a specific size or finish which is not shown here, for example 90mm wide boards please do not hesitate to contact us as we do manufacture "special" products for our clients (subject to quantity).

We can also make engineered pre-finished parquet panels 450mm Square or 570mm Square in Walnut. Our Finesline walnut is also one of the most sustainable Walnut products available.

We only select the finest quality layers for our American Black Walnut and any waste is used within our Finesline Walnut products.





E511 Engineered American Walnut Floor. See below.

SAPPHIRE-E501



Engineered Lacquered American Black Walnut

Typical American Walnut floor with knots, burr, grain and character. Grade ABCD.

Width	190mm with a micro bevel
Thickness	19mm tongue and groove 4 sides
Structure	Top 4mm solid American Walnut Base 15mm crossply hardwood
Length	1860mm with one board per carton split
Coverage per Carton	1.41m ² in 4 pieces
Finish	Lacquered
Floor Fitting Options	N G F UFH

SAPPHIRE-E502




Engineered Natural Oiled American Black Walnut

Typical American Walnut floor with knots, burr, grain and character. Grade ABCD.

Width	190mm with a micro bevel
Thickness	21mm tongue and groove 4 sides
Structure	Top 6mm solid American Walnut Base 15mm crossply hardwood
Length	1860mm with one board per carton split
Coverage per Carton	1.41m ² in 4 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	N G F UFH

SAPPHIRE-E508

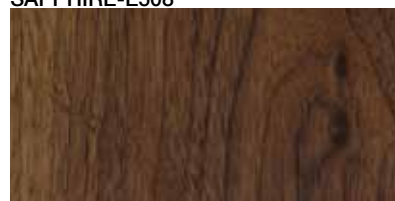


Engineered Lacquered American Black Walnut

Typical American Walnut floor with knots, burr, grain and character. Grade ABCD.

Width	190mm with a micro bevel
Thickness	21mm tongue and groove 4 sides
Structure	Top 6mm solid American Walnut Base 15mm crossply hardwood
Length	1860mm with one board per carton split
Coverage per Carton	1.41m ² in 4 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	N G F UFH

SAPPHIRE-E511

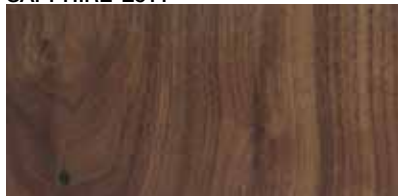

Engineered Natural Oiled American Black Walnut

Typical American Walnut floor with knots, burr, grain and character. Grade ABCD.

Width	190mm with a micro bevel
Thickness	19mm tongue and groove 4 sides
Structure	Top 4mm solid American Walnut Base 15mm crossply hardwood
Length	1860mm with one board per carton split
Coverage per Carton	1.41m ² in 4 pieces
Finish	WOCA Master Oil
Floor Fitting Options	N G F UFH

SAPPHIRE-E512



Engineered Lacquered American Black Walnut

Typical American Walnut floor with knots, burr, grain and character. Grade ABCD.

Width	190mm with a micro bevel
Thickness	21mm tongue and groove 4 sides
Structure	Top 6mm solid American Walnut Base 15mm crossply hardwood
Length	1860mm with one board per carton split
Coverage per Carton	1.41m ² in 4 pieces
Finish	Lacquered
Floor Fitting Options	N G F UFH

DIAMOND-E704



Engineered Finesline Walnut Floor

Prime Grade Designer board, no knots. Grade AB.

Width	190mm with a micro bevel
Thickness	19mm tongue and groove 4 sides
Structure	Top 4mm solid Walnut Base 12mm Walnut core, 3mm bottom
Length	1860mm with one board in each carton split
Coverage per Carton	1.77m ² in 5 pieces
Finish	Natural WOCA Oil
Floor Fitting Options	N G F UFH

N Suitable for **secret nailing** or **secret screws**.

G Suitable to **glue** directly to screed or floors using Bona R850 adhesive.

F Suitable for **floating** on underlay where the tongue and grooves are glued together.

UFH Suitable for **underfloor heating** but always glue to the screed if possible.

TOPWOOD FLOORING

Our new commercial and contractors range of wood flooring for large volume installations. All the boards are high quality and durable with 4mm of solid oak backed with 11mm of plywood giving a total of 15mm, perfect to match up with ceramic tiles or natural stone flooring.

Our "Budget" Contractors and Developers range uses a simple 3 ply construction to further reduce costs and will have a 3mm or 4mm solid oak top layer. This keeps the raw material costs at a minimum whilst still producing a real hardwood floor.

We do a limited range in this and keep up with modern trends, but if you want a finish or colour that is not shown then please let us know and we can manufacture for you and deliver to site within 12 weeks or sooner depending on our production schedule.

TW-E108



Engineered Brushed White Oiled Oak

Select Grade, with few knots.
Grade ABC.

Width	148mm with 1mm micro bevel
Thickness	15mm tongue and groove all sides
Structure	Top 4mm solid oak Base 11mm with poplar core
Length	1830mm
Coverage per Carton	1.63m ² from 6 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	<input type="checkbox"/> N <input type="checkbox"/> G <input checked="" type="checkbox"/> F <input type="checkbox"/> UFH

TW-E122



Engineered Brushed White Oiled Oak Floor

Select grade white oiled oak.
Grade ABC.

Width	189mm with 1mm micro bevel
Thickness	15mm tongue and groove all sides
Structure	Top 4mm solid oak Base 11mm crossply hardwood
Length	1860mm
Coverage per Carton	2.81m ² in 8 pieces
Finish	UV oiled
Floor Fitting Options	<input type="checkbox"/> N <input type="checkbox"/> G <input checked="" type="checkbox"/> F <input type="checkbox"/> UFH

TW-E124



Engineered Brushed Silver Limed Oak Floor

Select grade with few knots.
Grade ABC.

Width	189mm with 1mm micro bevel
Thickness	15mm tongue and groove all sides
Structure	Top 4mm solid oak Base 11mm crossply hardwood
Length	1860mm
Coverage per Carton	2.81m ² in 8 pieces
Finish	UV oiled
Floor Fitting Options	<input type="checkbox"/> N <input type="checkbox"/> G <input checked="" type="checkbox"/> F <input type="checkbox"/> UFH

TW-E125



Engineered Brushed Extra White Oiled Oak

Select grade white oiled oak.
Grade ABC.

Width	189mm with 1mm micro bevel
Thickness	15mm tongue and groove all sides
Structure	Top 4mm solid oak Base 11mm crossply hardwood
Length	1860mm
Coverage per Carton	2.81m ² in 8 pieces
Finish	UV oiled
Floor Fitting Options	<input type="checkbox"/> N <input type="checkbox"/> G <input checked="" type="checkbox"/> F <input type="checkbox"/> UFH

TW-E132



Engineered Natural Oiled Oak Floor

Rustic oak with character and knots.
Grade CD.

Width	189mm with 1mm micro bevel
Thickness	15mm tongue and groove all sides
Structure	Top 4mm solid oak Base 11mm crossply hardwood
Length	1860mm
Coverage per Carton	2.81m ² in 8 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	<input type="checkbox"/> N <input type="checkbox"/> G <input checked="" type="checkbox"/> F <input type="checkbox"/> UFH

TW-E136



Engineered Brushed Natural Oiled Oak Floor

Select grade oiled oak with few knots.
Grade ABC.

Width	189mm with 1mm micro bevel
Thickness	15mm tongue and groove all sides
Structure	Top 4mm solid oak Base 11mm crossply hardwood
Length	1860mm
Coverage per Carton	2.81m ² in 8 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	<input type="checkbox"/> N <input type="checkbox"/> G <input checked="" type="checkbox"/> F <input type="checkbox"/> UFH



Design and Create - the floor and benches in this workplace canteen are made using E158 Brushed and White Oiled Oak from our Amethyst Range.

TW-E138



Engineered White Oiled Oak Floor

Select grade white oiled oak.
Grade ABC.

Width	189mm with 1mm micro bevel
Thickness	15mm tongue and groove all sides
Structure	Top 4mm solid oak
	Base 11mm crossply hardwood
Length	1860mm
Coverage per Carton	2.81m ² in 8 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	N G F UFH

TW-E140



Engineered Smooth Natural Oiled Oak Floor

Mixed grade, will contain knots and character. Grade CD.

Width	189mm with 1mm micro bevel
Thickness	15mm tongue and groove all sides
Structure	Top 4mm solid oak
	Base 11mm crossply hardwood
Length	2200mm
Coverage per Carton	3.33m ² in 8 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	N G F UFH

TW-E141



Engineered Brushed Natural Oiled Oak Floor

Mixed grade, will contain knots and character. Grade CD.

Width	189mm with 1mm micro bevel
Thickness	15mm tongue and groove all sides
Structure	Top 4mm solid oak
	Base 11mm crossply hardwood
Length	2200mm
Coverage per Carton	3.33m ² in 8 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	N G F UFH

TW-E142



Engineered Unfinished Oak Floor

Select grade, will contain some knots.
Grade CD.

Width	189mm with 1mm micro bevel
Thickness	15mm tongue and groove all sides
Structure	Top 4mm solid oak
	Base 11mm crossply hardwood
Length	1860mm
Coverage per Carton	2.81m ² in 8 pieces
Finish	Unfinished
Floor Fitting Options	N G F UFH

TW-E145



Engineered Carbonized Natural Oiled Oak Floor

Select grade, with few knots.
Grade CD.

Width	189mm with 1mm micro bevel
Thickness	15mm tongue and groove all sides
Structure	Top 4mm solid oak
	Base 11mm crossply hardwood
Length	1860mm
Coverage per Carton	2.81m ² in 8 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	N G F UFH



EXTENSIVE STOCKS FOR IMMEDIATE DELIVERY NATIONWIDE AND EUROPE

BAMBOO



Bamboo flooring has the qualities of a natural appearance and soft colour which adds a unique ambiance by giving warmth in the winter, coolness in the summer and an elegance which will enhance your home or business.



Believe it or not bamboo is the fastest growing plant on the planet. The mature period of bamboo is only 3-5 years while hardwood trees take at least 30-70 years to be harvested. With the rising concerns of declining forests all over the world, bamboo is considered the best replacement material for hardwood.

Bamboo won the name "natural beauty" because of its unique and elegant texture. It has been widely used throughout the ages for ornamental and structural applications due to both its decorative and tensile qualities. Culture inspires bamboo products and in turn, bamboo products become part of the culture in many nations all over the world.

Sophisticated to relaxed, bamboo products provide all kinds of styles. Our products, such as our bamboo flooring when placed in your home allows you to enter a far away world showing a unique sense of Asian culture.

B435 Antique Carbonised Coffee Bean Bamboo in Crew Clothing

SAPPHIRE-B432



Natural Horizontal Bamboo Floor

Prime grade natural oiled Bamboo. Grading A.

Width	96mm with a micro bevel
Thickness	15mm tongue and groove 4 sides
Structure	3 horizontal layers of solid bamboo
Length	1000mm
Coverage per Carton	2.21m ² in 24 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	G F UFH

SAPPHIRE-B434



Vertical Carbonized Bamboo Floor

Natural oil carbonized Bamboo. Grading A.

Width	96mm with a micro bevel
Thickness	15mm tongue and groove 4 sides
Structure	Vertical layers of solid bamboo
Length	1000mm
Coverage per Carton	2.21m ² in 24 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	G F UFH

SAPPHIRE-B435



Antique Carbonised Coffee Bean Horizontal Oiled Bamboo Floor

Hand distressed to make it look 100 years old. Grading ABC.

Width	125mm with a micro bevel
Thickness	17mm tongue and groove 4 sides
Structure	3 horizontal layers of solid bamboo
Length	1000mm
Coverage per Carton	2m ² in 16 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	G F UFH

SAPPHIRE-B436



Carbonised Coffee Bean Horizontal Oiled Bamboo Floor

Rich, dark bamboo floor. Grading ABC.

Width	125mm with a micro bevel
Thickness	17mm tongue and groove 4 sides
Structure	3 horizontal layers of solid bamboo
Length	1000mm
Coverage per Carton	2m ² in 16 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	G F UFH

SAPPHIRE-B439UF



Unfinished Carbonized Strand Woven Bamboo Floor

Carbonised unfinished Bamboo, ready for finishing. Grading AB.

Width	137mm with a micro bevel
Thickness	14mm tongue and groove 4 sides
Structure	Strands of Bamboo compressed together
Length	1830mm
Coverage per Carton	2.01m ² in 8 pieces
Finish	Unfinished
Floor Fitting Options	G F UFH

SAPPHIRE-B440



Natural Strand Woven Bamboo Floor

Prime Grade commercial Lacquered Bamboo. Grading AB.

Width	137mm with a micro bevel
Thickness	14mm tongue and groove 4 sides
Structure	Strands of Bamboo compressed together
Length	1830mm
Coverage per Carton	2.01m ² in 8 pieces
Finish	Lacquered
Floor Fitting Options	G F UFH

SAPPHIRE-B441



Carbonized Strand Woven Bamboo Floor

Rich natural oiled Bamboo. Grading AB.

Width	137mm with a micro bevel
Thickness	14mm tongue and groove 4 sides
Structure	Strands of Bamboo compressed together
Length	1830mm
Coverage per Carton	2.01m ² in 8 pieces
Finish	WOCA Natural Oil
Floor Fitting Options	G F UFH

SAPPHIRE-B444




Strand Woven Coffee Bean Bamboo Floor

Rich, dark lacquered bamboo flooring. Grading AB.

Width	137mm
Thickness	14mm tongue and groove 4 sides
Structure	3 horizontal layers of solid bamboo
Length	1830mm
Coverage per Carton	2m ²
Finish	Bona industrial mat naturale lacquer
Floor Fitting Options	G F UFH

SAPPHIRE-B450

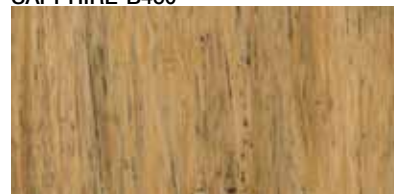


Antique Strand Woven Bamboo Floor

Natural, hand distressed strand woven bamboo. Grading AB.

Width	137mm
Thickness	14mm tongue and groove 4 sides
Structure	3 horizontal layers of solid bamboo
Length	1830mm
Coverage per Carton	2m ²
Finish	Bona industrial mat naturale lacquer
Floor Fitting Options	G F UFH

B430 Antique Carbonised Bamboo Flooring

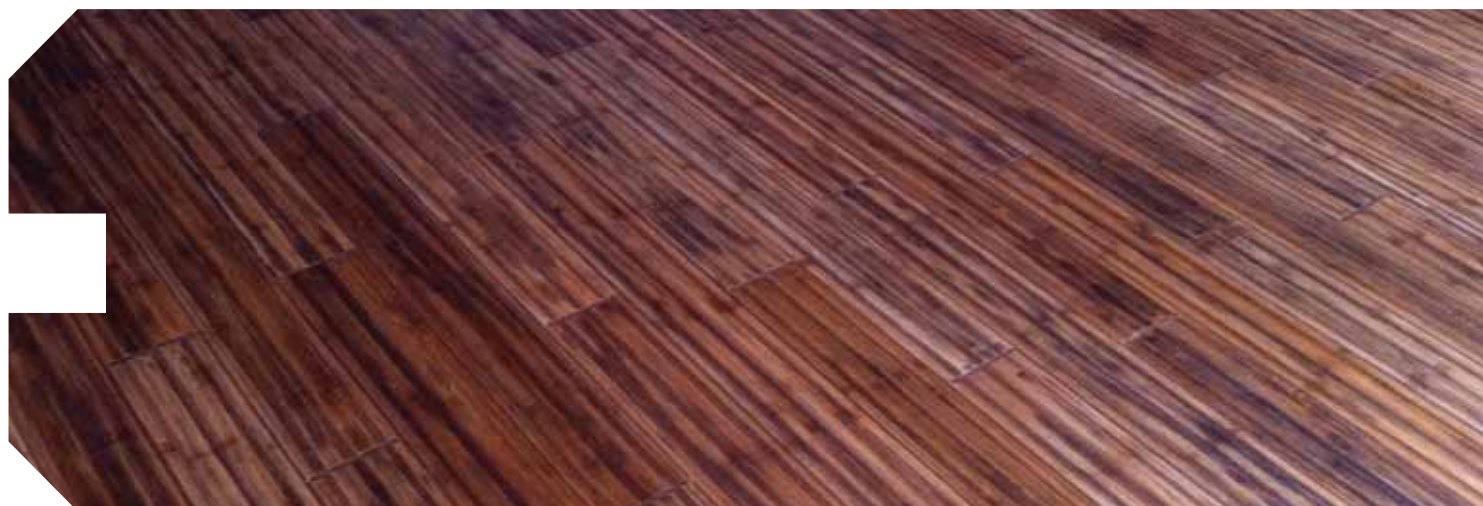

N Suitable for **secret nailing** or **secret screws**.

G Suitable to **glue** directly to screed or floors using Bona R850 adhesive.

F Suitable for **floating** on underlay where the tongue and grooves are glued together.

UFH Suitable for **underfloor heating** but always glue to the screed if possible.

PARQUET FLOORING



The ageless classic beauty of a parquet floor reflects the very best of traditional flooring techniques. Hardwood blocks can be laid in a variety of patterns that will reflect your lifestyle and compliment your surroundings.



Engineered Parquet Panels

Some samples of these are shown above and they are individually made to your own design and prefinished at the factory. These panels have a 5mm solid top layer, are tongue and groove on all 4 sides and they match our engineered boards which you can use for a border.

You can mix walnut and Oak in the same panel and have different colours like the Lyon City Hall floor. These panels are a prepayment with a 12 week lead time. The quicker option is to have our new system installed by our fitters as we can do any pattern you want.

Eazy Fit Parquet Flooring

This can be used over underfloor heating and will last a lifetime. This is a much better system than using the old traditional 22mm thick blocks as they can move and become dislodged over time. It also means you have little movement and the floor will always be perfectly flat. Maintenance is easy and any damage can be repaired quickly and simply.

After extensive research, we have developed what we feel is the perfect solution for the modern parquet floor. Old



parquet block floors were 20mm to 22mm thick and were fixed using bitumen on to a subfloor that was not always level which is why old parquet floors keep lifting. They also expand and contract which is why you get gaps and loose blocks. Our system uses 18mm marine quality plywood fixed to the subfloor.

The 2400mm x 1200mm plywood sheets give the perfect flat surface on which to glue the block giving a lifetime trouble free installation. We can make any design you like from the traditional herringbone pattern to the most complicated design. We have the following parquet block sizes 250mm x 70mm, 350 x 90 and chevron block (for chevron patterns) 280mm x 90mm and a border piece 1250 x 90mm all square edged and 10mm thick which means you can use our system with UFH.

We first fix 18mm marine plywood to the subfloor or glue it down to an underfloor heating screed. The fitters can then make any design you wish by gluing the parquet pieces down on to the plywood, finishing with a light sanding as our blocks are sanded to 120 grit and then finished according to your requirements. We



normally recommend oils or hard wax oils available from Timberex. You can create any colour and finish you desire from modern contemporary to old fashioned English in oak or walnut.

Bamboo Parquet

Our new carbonised strand woven bamboo parquet block flooring is the hardest and most Eco friendly and sustainable in today's flooring market. We developed this especially for the demands of commercial flooring to get the hardest and toughest flooring that looks traditional. This can be used over underfloor heating and will last a lifetime. Strand woven bamboo is three times harder than Oak and will withstand most applications without any surface defects at all.

Our Eazi-Fit parquet floor panels are suitable for use with underfloor heating systems.

EAZYFIT-100



Solid Unfinished Oak
Parquet Block

Select Grade Parquet, few knots.
Grading ABC.

Width	70mm
Thickness	10mm
Structure	Solid oak
Length	250mm
Coverage per carton	0.95m ² in 54 pieces
Finish	Unfinished
Floor Fitting Options	N G F UFH

EAZYFIT-101



Solid Unfinished Oak
Parquet Block

Select Grade Parquet, few knots.
Grading ABC.

Width	90mm
Thickness	10mm
Structure	Solid oak
Length	350mm
Coverage per carton	1.13m ² in 36 pieces
Finish	Unfinished
Floor Fitting Options	N G F UFH

EAZYFIT-108



Solid Unfinished Basketweave
Parquet Blocks

Select Grade Parquet, few knots.
Grading ABC.

Width	70mm
Thickness	10mm
Structure	Solid oak
Length	350/140mm
Coverage per carton	0.98m ²
Finish	Unfinished
Floor Fitting Options	N G F UFH

SAPPHIRE-S400



Solid Strand Woven Unfinished
Bamboo Parquet

Carbonized unfinished Bamboo, ready to be
finished. Grading AB.

Width	70mm
Thickness	8mm
Structure	8mm strand woven bamboo
Length	250mm
Coverage per carton	3.5m ² in 200 pieces
Finish	Unfinished
Floor Fitting Options	N G F UFH

NAVYLAM+ Bathroom Parquet



Solid Parquet, designed for use
in bathrooms

Solid Navylam+ Waterproof
Parquet.

Width	68mm
Thickness	9mm
Structure	9mm Solid wood
Length	400-1200mmmm
Coverage per carton	n/a
Finish	Navylam Oiled
Floor Fitting Options	N G F UFH

Sapphire-S520



Solid Unfinished Walnut
Parquet Block

Mixed grade with knots and grain variation.
Grade ABCD.

Width	70mm
Thickness	8mm
Structure	8mm thick solid walnut
Length	250mm
Coverage per carton	3.5m ² in 200 pieces
Finish	Unfinished
Floor Fitting Options	N G F UFH



Premade Parquet Panels in the Church of Transfiguration





Canadian hard maple is a wooden floor that is unique in its hue and grain variation. We select our maple hardwood flooring to ensure that you do not get those black streaks and big knots that are common to most maple floors.



Canadian Maple Hotel dance floor.

DIAMOND-E816



Engineered Canadian Maple Flooring

Very Clean board with no black streaking or large knots. Grade AB.

Width	127mm with a micro bevel
Thickness	20mm tongue and groove 4 sides
Structure	Top 4mm solid maple
	Base 16mm crossply hardwood
Length	Random lengths
Coverage per Carton	2.24m ²
Finish	Bona Naturale Lacquer
Floor Fitting Options	N G F URH

BAMBOO, OAK AND WALNUT ACCESSORIES

All our Accessories are manufactured to match our flooring and therefore can be used to finish off your floor installation perfectly. The exact accessory you will need will be shown

on the product details on the web site with the matching product code which will have an abbreviation as below and also a number. We have accessories to match all our Antique

Oak, Oak and Walnut Flooring. The following is the normal application for each accessory.

For further advice please call our helpline non 01666 504015.



Skirting (SK)

Used to match the floor instead of painted skirting.



Step Nosing (STN)

Used to finish off against fire surrounds, mat wells and many other applications.



End Moulding (END)

Used where a floor finishes and there is a lower floor or tiles, also has many other applications.



Reducer Bar (TR)

Used to reduce the level of the floor down to a tile for example.



Stair Nosing (SN)

Used to finish off the end of a stair tread and also allows a riser to be fitted. You can use our flooring to make the stairs as well.



T Moulding (TM)

Used where a wooden floor goes to carpet or where you need an expansion gap in the floor in doorways etc.



Face Moulding (FACE)

Used to cover the floor surface if an expansion gap underneath is required or any other application your fitter may deem necessary.



Radiator Pipe Cover

Use these covers to perfectly cover any gaps visible where a pipe passes through the floor.

CARING FOR WOOD

We believe in preparing for tomorrow today. Following the correct advice and using our recommended maintenance products will keep your floor looking good today whilst protecting your investment for the future.



Maintenance is the key to keeping your floor looking brand new all year round. Using the recommended maintenance products for your flooring allows you to achieve this. We supply a variety of floor maintenance kits all from the manufacturers of the finishes we use to ensure complete compatibility. We also supply the replenishment tubs of various products to save on costs.



Timberex Maintenance Kit

The Timberex Maintenance Kit is for use on Timberex oiled floors. This maintenance kit contains Bio-Cleaner, Satin Oil Gold Mousse, and Satin Oil Gold.



WOCA Maintenance Kit

The WOCA Maintenance Kit is for use on Natural and UV Oiled floors. This Maintenance Kit contains Natural Soap, Intensive Wood Cleaner and UV Maintenance Paste/Natural Maintenance Oil.

Some Simple tips to avoid damage:

- Do not clean wooden floors with a wet mop. Too much water can cause the floor to swell and warp.
- Be sure to use the recommended cleaning products for your wooden floor to maintain its original finish.
- Vacuum or sweep your floors regularly, once a week is recommended.
- Remove spills promptly to avoid any water damage on your wood flooring.
- Placing our Dirt Trapper mats at exterior doors will avoid any dirt, sand and grit from getting onto your flooring.
- Using our protective felt pads under furniture can help avoid any scratches/gouges in the flooring.



BONA Spray Mop

The BONA Spray Mop is for use on BONA Lacquered floors. This Spray Kit contains the easy to build Spray Mop, Wood floor cleaner cartridge, and a microfiber cleaning pad.



Blanchon Lagoon Cleaning Kit

The Blanchon Lagoon Kit is for the maintenance of the Blanchon oiled floors. This cleaning kit contains an easy to build mop, Lagoon spray cleaner, and microfiber cleaning pad.



FINISHING TOUCHES



La Piscine Museum

Starting with the blank canvas of our unfinished boards, you can select from an almost limitless range of colours, sheens and finishes to create the perfect ambience for your room.

Our modern, oiled finishes require less maintenance and are more durable than you think and are perfect for high traffic areas such as shops, museums, offices or airports.



Timberex applied in Hallwylska Museum, Stockholm



Blanchon oil used at Seoul Airport

Timberex coloured oils

The **FIRST Choice** as they dry quicker and are more resilient than any other oils, the special **Hardwood Lut** (an agent that opens the grain) allow the creation of whiter or darker floors.

Timberex Hard Wax Oil greatly enhances colours and grain and allows wood to age naturally into rich varying tones. Can be used on wood floors and worktops.

- Made from fast curing natural plant oils and wax
- Available in matt or satin finish
- Same day application and finish

- Easy to apply
- Easily refurbished
- Does not leave swirl marks

Timberex oils are the best in the market, fast drying with easy application. A lot of our prefinished boards will be coated with the industrial oils for a hard wearing commercial finish. The colours shown are just an example

of what we can achieve, any colour is possible by mixing the standard colours as shown with some samples here. You can enhance these colours by finishing with hardwax oil to give the surface a nice lustre. The colours shown can be applied to any of our square edge unfinished engineered wood flooring ranging from 1830 to 2500mm long in widths of 150, 189, 220, 260 and 340mm.



Black Walnut



Black



Cherry



Dark Walnut



Driftwood



Early American



Extra white



Mahogany



Medium Walnut



Teak



White

Blanchon Oils and Hard Wax

These oils take longer to dry but some of the colours available cannot be obtained using other oils. Some of Blanchon's colours are unique.

Blanchon Coloured Hard Waxoils are popular due to the drying times, great colours and ease of application. More durable than standard oil, they can be used on any internal joinery, one coat on any area not taking foot traffic, two coats on flooring. All in one staining and protection makes for a quick, cost effective and easy solution. Due to its durability, Blanchon oils have been used for floors at Seoul Airport, London Hilton, La Piscine Museum and Lyon Town Hall. In detail, the advantages of our hard waxoils are as follows;

- Quicker drying than most other hard waxoils, harder wearing and more depth of colour than standard floor oils.

- Sufficiently liquid to work into the grain to emphasise the natural beauty of wood.
- Simple two coat system whatever the colour.
- A wide range of 12 natural colours.
- All colours are as easy to apply as the clear and mixable for colour matching.
- Conforms to the European Toy Safety Standard EN 71.3.
- Handy 250ml sample pots for testing.

Wood Floor Oil Environment

This is a water-based oil which leaves the wood looking unfinished and dries 1hr per coat, three coats in total. It also carries the Ecolabel, the only pan European certification for genuinely environmentally finishes.

Wood Ageing Agent

This is a water based agent similar to a lye and available in a range of 12 colours from silvers through to distressed oaks. You can overcoat with a hard waxoil to create a contrast in colours or just apply clear oil. This is a unique product on the market, totally up to the minute in terms of distressed and grey floor fashions. Leave to dry for 3-5hrs and see it reverse the grain and create an instant aged look. For example distressed oak with white grey hard waxoil or rough timber hard waxoil. For a fumed look try ash grey plus clear hard waxoil, always two coats of Hard Waxoil on top of the Wood Ageing Agent. The pictures below show oils on an installed floor and the colour effect they can have on a White Oak.



Blanchon white wood ageing agent (WAA) and white hard wax oil finish



Blanchon light grey two coats hard wax oil



Blanchon light oak hard wax oil two coats



Blanchon rough timber hard wax oil two coats



Blanchon colourless + natural hard wax oil (WAA)



Blanchon white oiled floor with extra white finish.



Blanchon walnut hard wax oil two coats



Blanchon white hard wax two coats



Blanchon wenge + natural hard wax oil (WAA)



Blanchon old English + hard wax oil (WAA)



Blanchon silver + hard wax oil (WAA)



Blanchon honey + natural hard wax oil (WAA)

THE SAMPLE PICTURES HERE WERE APPLIED TO A RANGE OF OUR UNFINISHED NATURAL OAK ENGINEERED FLOORING SUCH AS E303, E102, E110, E120, E150 & E157.

WOCA Woodcare Denmark Oils

WOCA coloured master oils and wood lyes offer a different range of oils to allow you to obtain virtually any colour. When using softwood lyes it opens the grain and pulls the tannins out of the wood, this will darken oak and when you apply coloured oils such as the brazil brown you achieve a deeper richer brown colour.

You can see the contrast on some of our unfinished boards. These range from pre-colour white with white master oil to the dark brazil brown where softwood lye has been applied first, to where we have just applied brazil brown on its own. The range, available from the "unfinished" look to Wenge or Black, is too numerous to mention here.

We are happy to apply them to samples and then send them free of charge to your office or home. Alternatively you can see a variety of WOCA Master oils and coloured oils applied to our unfinished boards at The Building Centre. WOCA oils were used at Copenhagen Airport and St Pancreas station due to their durability and ecologically friendly ingredients.



Master oil white



Wood cleaner, softwood lye and Brazil brown



Pre colour white and extra white



Natural master oil



Softwood lye and walnut



Wood cleaner and white master oil



Wood cleaner and extra white colour oil



Softwood lye and antik oil



Softwood lye and black master oil



Brazil brown oil



Wood cleaner and extra white



Extra white master oil

THE DURABLE CHOICE



We have three main ranges of flooring which differentiates the finishes and production line. All the finishes are applied under strict factory and quality control procedure to ensure the hardest wearing surfaces available.

This guide explains our factory prefinished floor finishes and the products we use to ensure a trouble free floor. The final finish will depend on your personal taste but as we use industrial strength lacquers our floors will stand up to most situations.

If you want a higher gloss then you can use the Bona Polish Gloss product which you can apply with the Bona Micro Fibre applicator pad found in the Bona maintenance kits. We have three main finishes as follows and all are applied under strict factory and quality control procedures which will ensure a perfect floor.



Bona Naturale Lacquered Floors

One of the hardest finishes available.

We use the Bona Naturale for industrial applications and apply 9 coats as follows:

1. One coat of UV Primer. This gives good adhesion and is cured using IR drying lamps
2. Three coats of UV curing light filler giving high abrasion resistance
3. One coat of UV base coat (anti-scratch) cured with a UV lamp
4. One coat of Bona Naturale base coat cured with a UV lamp
5. One coat of UV base coat cured with a UV lamp
6. Two coats of Bona Naturale top coats cured with lamps and this top coat has a high resistance to scratching due to its industrial strength. This finish is harder wearing than Bona Traffic applied on site and will last longer with greater scratch resistant.

Treffert Industrial Finish Lacquered Floors

One of the toughest finishes available. For this range we use Treffert lacquers and apply 9 coats. The process is as follows:

1. UV-PU insulation coat
2. UV-sealer sandable for the back board
3. UV-filler transparent pumpable
4. UV-Duro sealer (standard)
5. UV-sealer transparent
6. UV-Duro sealer (standard)
7. UV-sealersSandable colourless
8. HPC anti scratch topcoat
9. HPC anti scratch topcoat



Natural Oiled Floors all Ranges including brushed Timberex

Timberex International originated from the South East of England and has been producing environmentally friendly and durable oils for floors, worktops, decking, furniture and for general Arts & Crafts applications since 1927. Timberex Hard Wax Oils greatly enhances the colour and grain of the wood and allows the wooden floor to age naturally into rich varying tones. Timberex oils are made from fast curing natural plant oils and wax and the hard wax oils are available in a matt or satin finish.

We mainly use the Timberex Industrial Heavy UV oil. The UV is inherent in the oil and it is not an application UV process but a UV inhibitor which prevents the floor from bleaching in the sun.

A floor finished with the heavy duty oil is the best option and we are changing a lot of our boards to this finish form a lacquer finish as it is easier to repair and maintenance is minimal.

UNDERFLOOR HEATING (UFH)

Our extensive range of engineered flooring which includes engineered parquet, is suitable for use with UFH. These systems are becoming more popular as they add an extra luxurious ambience to your home or workspace.



Engineered wooden flooring is the best material and choice for UFH as it is natural, warm to the touch (not like stone) and environmentally friendly as it is a renewable source which helps the environment. Engineered wooden floors from the Solid Wood Flooring Company are a perfect match with UFH as they are dried down to at least 8% moisture content. Above this level of

moisture some shrinkage may occur. As we have over 50 types of flooring suitable for use with an UFH system, the choice will be purely based on personal taste, budget and what matches your decor.

You should get a certificate from the company that fitted the UFH system to ensure that it is fully operational with controlled temperatures

so that the surface temperature does not exceed 27 degrees centigrade. Before the floor is fitted the under floor heating system should be calibrated back to the boiler to ensure the surface temperatures of the sub floor are correct. If there is no certification from the installer it may well invalidate any guarantees that apply to our wooden flooring.

Choice of System

Your choice of a UFH system will depend on your current sub floors, height restrictions and what you want the system to do for you. A good source of information can be found at www.uhma.org.uk. Electric carbon film and mat systems are acceptable for background heat and many are now getting more effective but hot water systems are generally more efficient and when you glue a wooden floor directly to the heated screed you get the best floor with the warmest touch.

There's been much discussion amongst flooring contractors in recent months about the thorny subject of anhydrite screeds. Many installations are failing, seemingly because of the highly specific requirements needed to ensure success. We feel that a normal concrete is best for UFH and we always prefer clients to have a concrete screed which should be kept as thin as possible - say 35mm to 40mm if you have to go to 70mm due to building regulations or site conditions then the drying time will be considerably longer. Generally, cement and anhydrite screeds dry out at the rate of 1mm per day. If you have a concrete screed you should always seal the surface with a damp proof membrane (DPM) such as the Bona R580 which is a trowel on membrane which will allow you to glue the floor directly to the screed. You should not put a DPM on an anhydrite screed.

Sub Floors and Joists

All sub floors must be prepared in accordance with normal sub floor preparation procedures and accepted tolerances within the flooring industry. Install BONA R580 trowel-on two part membrane moisture barrier over the screed to ensure that no problems occur in the future and follow the instructions for application and drying times. Before fitting the wood flooring, particular attention must be paid to ensure that:

- Moisture content of timber floor must not exceed 8%
- The moisture content of the concrete screed must not be higher than 1.8%
- Evenness - maximum tolerance of 3mm per linear metre
- Load capacity - The sub floor has to be a closed and self-supporting surface
- Cleanliness - the sub floor needs to be in a clean and vacuumed condition
- Joists must be in good condition and not more than 350mm centres

Installation of UFH

This should be left to qualified installers recommended by the manufacturer of the UFH system and ideally you should have a thermostat near the surface to ensure that the temperature never exceeds 27 degrees where the wood floor meets the screed or underlay.

There are so many UFH systems on the market today which means we cannot cover all aspects of UFH installation here. There are some relevant links and the main points to watch out for are:

- Hot water pipes must be at least 35mm below the top surface of the screed to ensure you get an even heat distribution and no "hot spots"
- There must be sufficient insulation below the UFH and also a good DPM to prevent heat loss and moisture being drawn up through the screed
- Ensure that you meet all building regulations and terms and conditions of the UFH system manufacturer, do not take short cuts to save money as the longer term costs could be enormous.





THE PERFECT CHOICE



Unit 1
Helena Court
Tetbury
Gloucestershire
GL8 8JN

Tel: 01666 504015
Mobile: 07831 680206
Email: enquiries@thesolidwoodflooringcompany.com

We have printed this brochure using FSC accredited paper from sustainable sources to protect our forests. When you have finished with this brochure please pass it on to a friend, retain it in your library for future reference or recycle it.



www.thesolidwoodflooringcompany.com